




# W92

## bar-stock thermowells, stepped shank, with flanged connection, NP 6...100

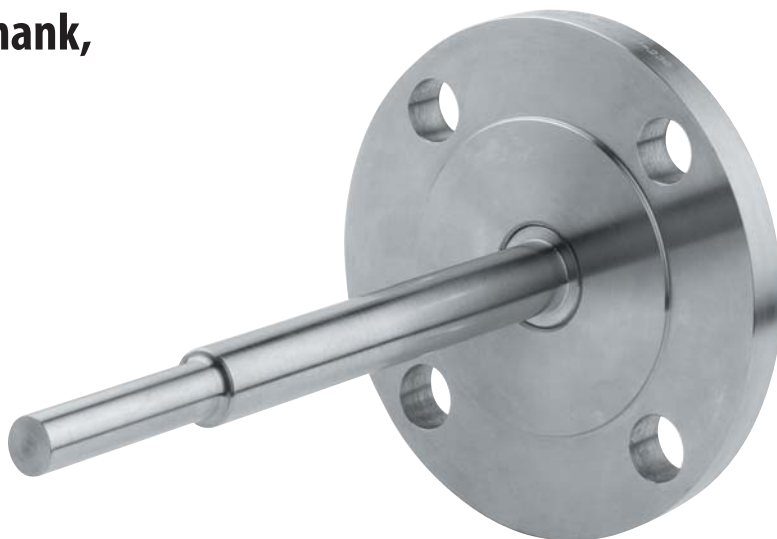

Thermowells are used to protect the measuring instrument from corrosion, high pressure or high fluid velocity and to allow the measuring instrument removal for recalibration or replacement without affecting the process system. The W92 serie includes bar-stock thermowells with flanged process connection and they are suitable for heavy work conditions. These thermowells have a stepped-shank immersion length for a better process temperature measuring sensibility.

### 9.W92 - Standard Model

**Nominal pressure:** as flange rating, 1450 psi @ 752°F max (100 bar @ 400°C).

**Process fluid temperature:** -328...+1112°F (-200...+600°C), for std materials.

**Total length:** max 40" (1000 mm).

**Process connection:** plain flanges as per UNI-DIN or ASME B16.5; dimensions and finishing as defined in "Thermowell information" sheet.

**Materials:**

AISI 316 (Cod. 4) or AISI 316L (Cod. 5) st.st. bar-stock; ASTM A 105 (Cod. 3), AISI 316 (Cod. 4) st.st flange.



**Special materials :** Monel 400, Hastelloy C276, Alloy 825, Alloy 625, Duplex SAF 2205, Duplex SAF 2507 flange and bar-stock (the flange is also available made by stainless steel, with wetted parts made by special material)

### OPTIONS

<b>P02</b> - Oxygen service
<b>E30</b> - NACE MR0103/MR0175 - ISO 15156-3 certificate
<b>TC1</b> - Plug and chain (1)
<b>NIP</b> - Nipple with coupling (1)
Double welding (1)
<b>FUL</b> - "full penetration" welding (1)
<b>P04</b> - Dye penetrant test (1)
<b>CVK</b> - ASME PTC 19.3 TW calculation (1)

(1) Drawings and details in the "Thermowells information" sheet.



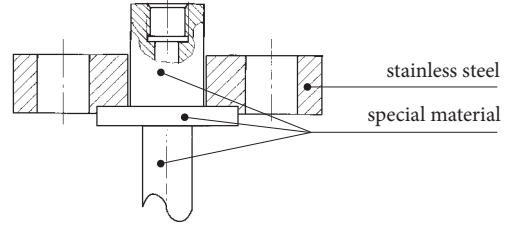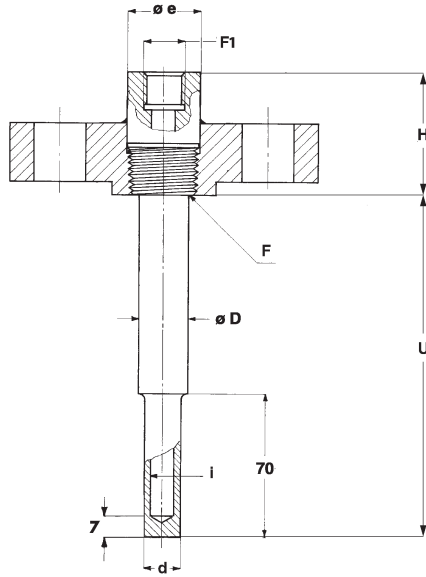

Version with stainless steel flange, but wetted parts made by special material

F1
41F - G 1/2
43F - 1/2-14 NPT
53F - 3/4-14 NPT

i
070 - $\phi$ 0.28 (7)
080 - $\phi$ 0.31 (8)
090 - $\phi$ 0.35 (9)
100 - $\phi$ 0.39 (10)
120 - $\phi$ 0.47 (12)

dimensions : inches (mm)

Standard	DN		F	e	H	i	D	d
ASME B16.5	3/4"	Class 150...1500	1/2" NPT	1.18 (30)	2.36 (60)	0.28-0.31-0.35 (7 - 8 - 9)	0.69 (17,5)	0.59 (15)
						0.39-0.47 (10 - 12)	0.71 (18)	0.71 (18)
	1"		3/4" NPT	1.18 (30)	2.36 (60)	0.28-0.31-0.35 (7 - 8 - 9)	0.71 (18)	0.59 (15)
						0.39-0.47 (10 - 12)	0.83 (21)	0.71 (18)
	1 1/2 2"		1" NPT	1.38 (35)	2.36 (60)	0.28-0.31-0.35 (7 - 8 - 9)	0.83 (21)	0.59 (15)
						0.39-0.47 (10 - 12)	0.98 (25)	0.71 (18)
EN 1092	20	NP 6...100	1/2" NPT	1.18 (30)	2.36 (60)	0.28-0.31-0.35 (7 - 8 - 9)	0.69 (17,5)	0.59 (15)
						0.39-0.47 (10 - 12)	0.71 (18)	0.71 (18)
	25		3/4" NPT	1.18 (30)	2.36 (60)	0.28-0.31-0.35 (7 - 8 - 9)	0.71 (18)	0.59 (15)
						0.39-0.47 (10 - 12)	0.83 (21)	0.71 (18)
	32, 40, 50		1" NPT	1.38 (35)	2.36 (60)	0.28-0.31-0.35 (7 - 8 - 9)	0.83 (21)	0.59 (15)
						0.39-0.47 (10 - 12)	0.98 (25)	0.71 (18)

## "HOW TO ORDER" SEQUENCE

Section / Model / Material / Flange / Instrument / Process / Insertion hole / Insertion / Extension / Options  
material connection connection length length

9 W92 4 3 41F 6AA 070 P02...P04  
5 4 43F 080  
53F 090  
100  
120

Copyright © Nuova Fima srl. All rights reserved. Any part of this publication should not be reproduced without a written Nuova Fima's srl approval

NUOVA FIMA USA Inc.  
www.nuovafima.com - e-mail: infousa@nuovafima.com  
4123 Hollister, Suite G - TX 77080 Houston  
TEL. +1 713.690.9800 - FAX +1 713.690.9803

-2-

NUOVA FIMA srl  
www.nuovafima.com - e-mail: info@nuovafima.com  
P.O. BOX 58 - VIA C. BATTISTI 59 - 28045 INVORIO (NO) ITALY  
TEL. +39 0322 253200 - FAX +39 0322 253232

