


BLUEWAVE

BLUETOOTH DATA LOGGER FOR PROCESS MONITORING

Forget connection bases, receivers, accessories and additional devices: today you can receive data in real time directly on your PC or on your Smartphone*. No connection bases, receivers, accessories are needed. With the BlueWave series for temperature and pressure processes monitoring the user can control processes in real time and without additional space. Receive data and share it instantly.

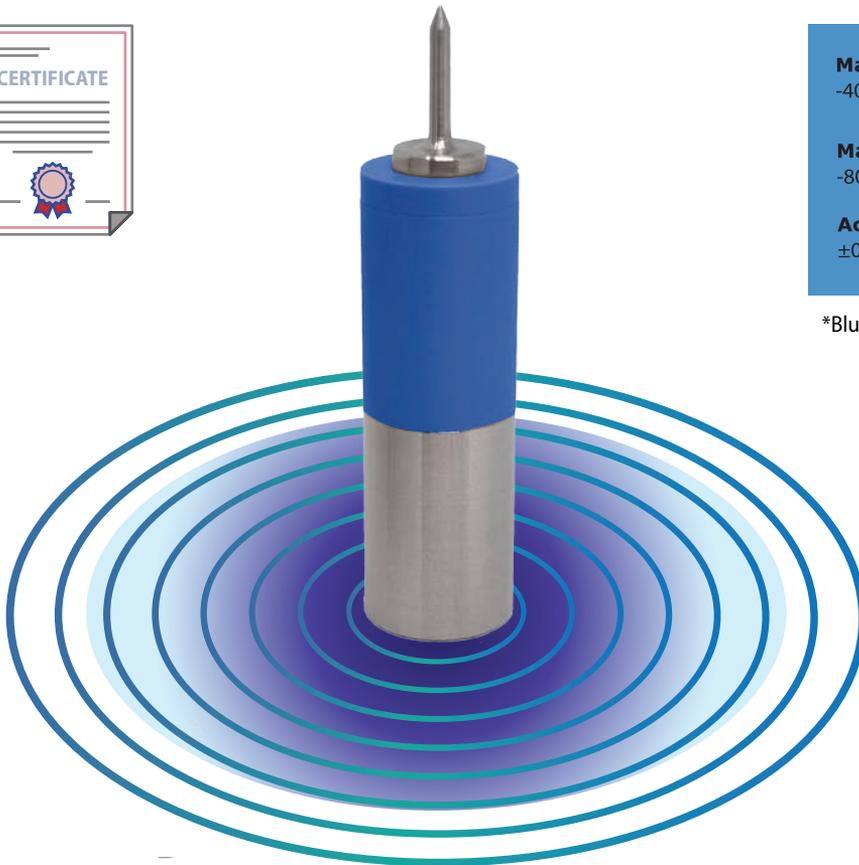

Maximum data logger range:

-40°C ÷ + 140°C

Maximum probe range:

-80°C ÷ + 500°C

Accuracy:

±0,1°C

*Bluetooth 5.0 or higher device required

	Bluewave Temperature	Bluewave Pressure
Height	70 mm	89 mm
Ø	23 mm	23 mm
Probe	Rigid Rigid + Bendable Flexible Bendable	Pressure Rigid + Pressure Bendable + Pressure
Battery life		
Data sheet		

Maximum data logger range:

-40°C ÷ + 140°C

0 bar ÷ 5 bar absolutes

Maximum probe range:

-80°C ÷ + 500°C

Battery:

Replaceable

*Bluetooth 5.0 or higher device required






Dashboard
2A.02 Pro DEFAULT Administrative ADMIN

Bluensee 60006A7D06A1 S.3 Nome Serial Number BT Version	Bluensee 0A006A7D06A1 S.3 Nome Serial Number BT Version	Bluensee 0A006A7D06A1 S.3 Nome Serial Number BT Version	Bluensee 0A006A7D06A1 S.3 Nome Serial Number BT Version
---	---	---	---

Profil
2A.02 Pro DEFAULT Administrative ADMIN

Temperature °C

Quarta	°C	NPH	Intervento
21/08/2023 15:00:53	20,08	02	Aggiornamenti manutenti
21/08/2023 15:04:54	40,00	03	Mano dalla espulsione
21/08/2023 15:04:57	30,08	03	20:00
21/08/2023 15:46:54	34,24	03	Aggiornamenti manutenti
21/08/2023 15:46:57	25,54	02	00:00
21/08/2023 15:46:58	03,90	02	Intervento
21/08/2023 15:48:01	30,08	03	Intervento
21/08/2023 15:48:04	34,23	03	
21/08/2023 15:48:57	25,54	02	



	C_500H °C	C_510 °C		C_500H °C	C_510 °C
15:25:00	25,63 °C	15 %	25,63 °C	15 %	25,63 °C
15:25:00	25,63 °C	15 %	25,63 °C	15 %	25,63 °C
15:25:00	25,63 °C	15 %	25,63 °C	15 %	25,63 °C
15:25:00	25,63 °C	15 %	25,63 °C	15 %	25,63 °C

